






BREITE	30	40	50	60	70	80	90	100	110	120	130	140	-	-	-
Schublade innen	257	357	457	557	Kombinationen aus mehreren Schubladen										
Externe Einheit	315	415	515	615	715	815	915	1.015	1.115	1.215	1.315	1.415			

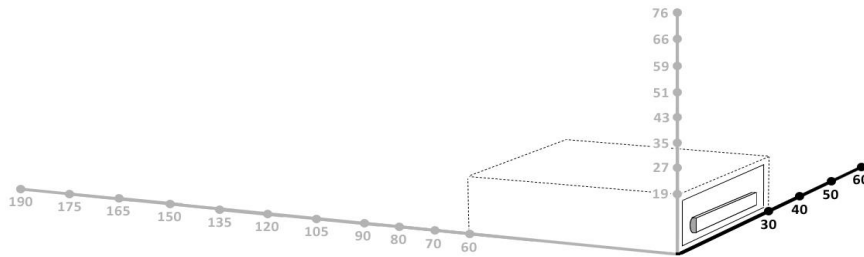

HÖHE	19	27	35	43	51	59	66	76	84	92	100	108	115	123	131
Schublade innen	117	196	275	354	432	511	590	669	Kombinationen aus mehreren Schubladen						
Höhe der Schubkastenführung	86	86	188	188	330	330	330	330							
Höhe der Trennwand	76	76	178	178	320	320	320	320							
Externe Einheit	191	270	348	427	506	585	663	761	839	918	996	1.075	1.154	1.233	1.310

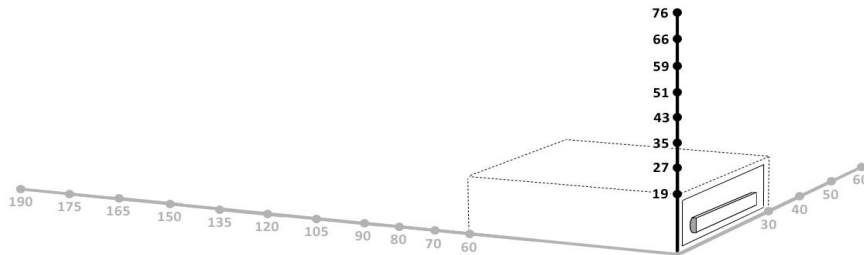


TIEFEN	60	70	80	90	105	120	135	150	165	175	190	-	-	-	-
Schublade innen	457	557	657	757	902	1.047	1.192	1.337	1.482	1.627	1.772				
Prozentsatz der Schalenöffnung (%)	76%	80%	83%	85%	82%	85%	87%	88%	89%	90%	91%				
Standard-Trennwand	-	-	-	-	1 Trennwand wird während der Produktion eingebaut										
Max. Tragfähigkeit pro Schublade	60 KG					100 KG									
Externe Einheit	591	691	791	891	1.036	1.181	1.326	1.471	1.616	1.761	1.906				

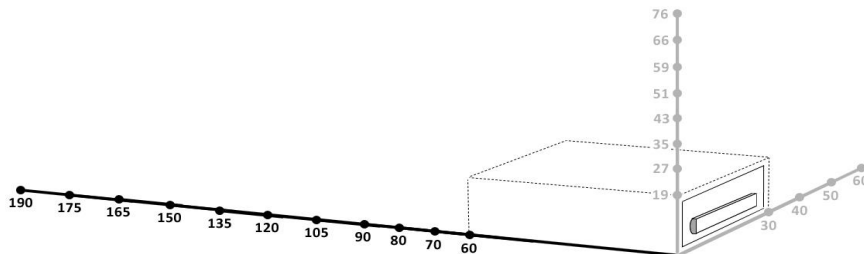




BREITE	30	40	50	60	-	-	-	-	-	-	-	-	-	-
Offenes Fach innen	275	374	473	572										
Externe Einheit	315	415	515	615										

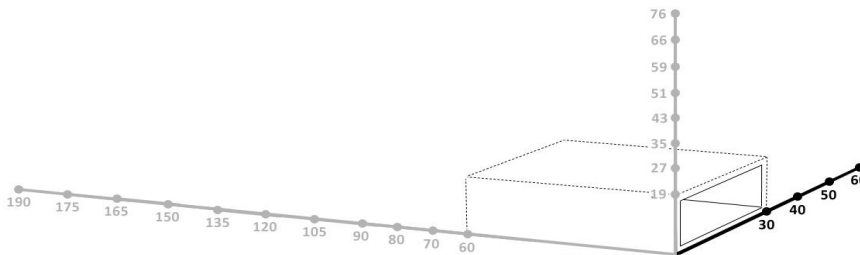

HÖHE	19	27	35	43	51	59	66	76	-	-	-	-	-	-
Offenes Fach innen	161	240	318	397	476	555	633	731						
Externe Einheit	191	270	348	427	506	585	663	761						

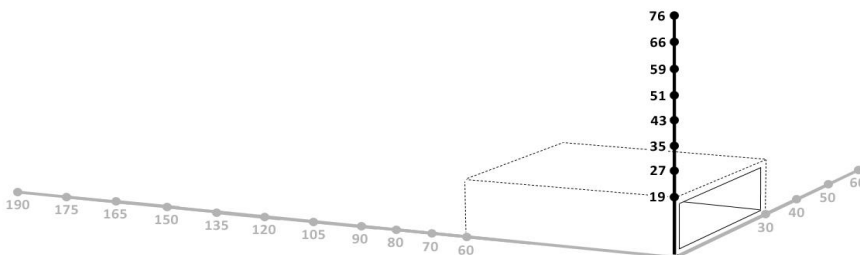

TIEFEN	60	70	80	90	105	120	135	150	165	175	190	-	-	-	-
Offenes Fach innen	540	640	740	840	985	1.130	1.275	1.420	1.565	1.710	1.855				
Externe Einheit	556	656	756	856	1.001	1.146	1.291	1.436	1.581	1.726	1.871				

